

30 Watt Photovoltaic Module

BP SX 30

4034E-1 02/04

The BP SX 30 is a 30W module that uses standard polycrystalline cells and charges batteries efficiently in any climate. It has been especially designed for use in off grid applications such as telecommunications, telemetry, instrumentation systems and signals. BP Solar's SX range of solar modules offer cost effective power for small or moderate energy requirements, with a wide range of module power and size options available for stand alone installations.

Performance

Rated power	30W
Nominal voltage	12V
Warranty	90% power output over 12 years. Free from defects in materials and workmanship for 2 years.

Configuration

BP SX 30U	Clear Universal frame and robust junction box.
-----------	--

Qualification Test Parameters

Temperature cycling range	-40°C to +85°C for 200 cycles
Damp heat test	85°C and 85% relative humidity for 1000h
Front & rear static load test (eg: wind)	2400 Pa
Front load test (eg: snow)	5400 Pa
Hailstone impact test	25mm hail at 23m/s from 1m distance

Quality and Safety

- Manufactured in ISO 9001 and ISO 14003 certified factories.
- Conforms to European Community Directive 89/33/EEC, 73/23/EEC, 93/68/EEC
- Certified to IEC 61215

Module power measurements calibrated to World Radiometric Reference through ESTI (European Solar Test Installation at Ispra, Italy)

Framed modules certified by TÜV Rheinland as Safety Class II (IEC 60364) equipment for use in systems up to 1000 VDC


Framed modules listed by Underwriter's Laboratories for electrical and fire safety (Class C fire rating)

Approved by Factory Mutual Research for application in NEC Class 1, Division 2, Groups C & D hazardous locations, and rated for use in systems up to 48V



BP SX 30U scale 1:9


BP SX 30U I-V Curves

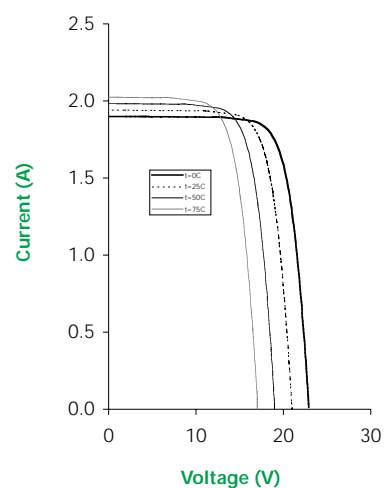

30 Watt Photovoltaic Module BP SX 30

4034E-1 02/04

Module Diagram

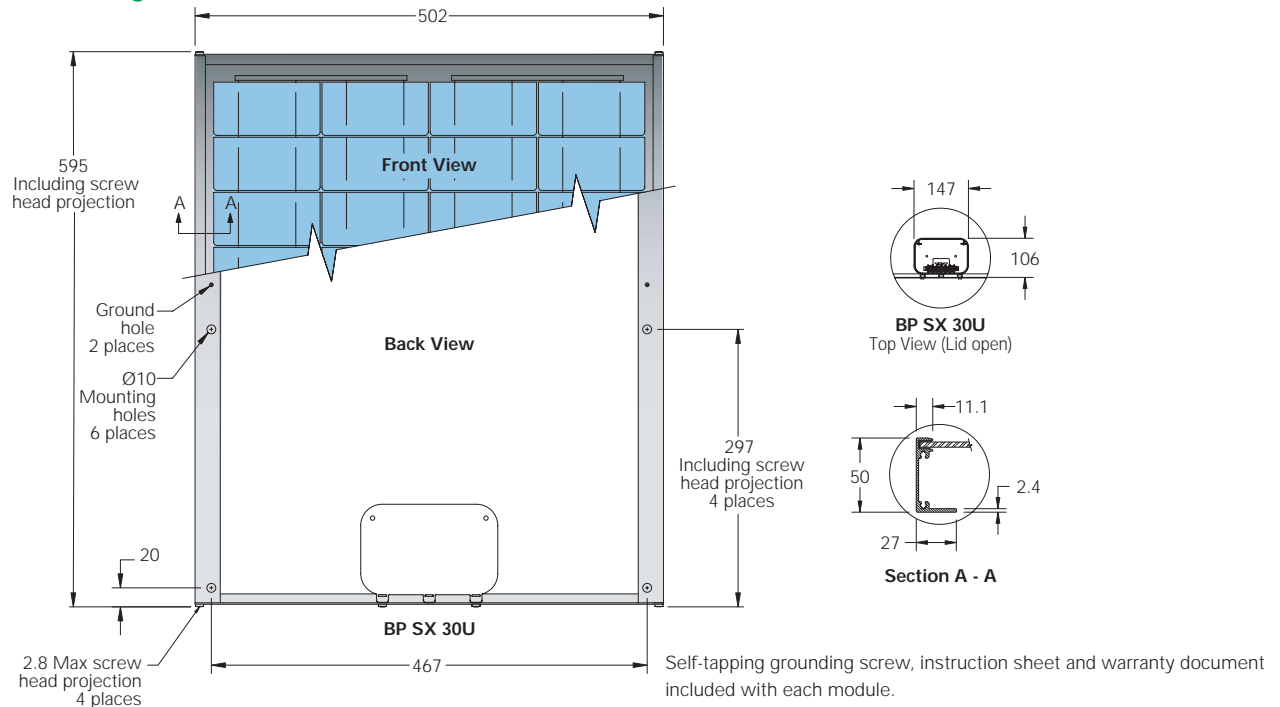

Typical Electrical Characteristics

BP SX 30

Maximum power (P_{max})	30W
Warranted minimum power	27W
Voltage at P_{max} (V_{mp})	16.8V
Current at P_{max} (I_{mp})	1.78A
Short circuit current (I_{sc})	1.94A
Open circuit voltage (V_{oc})	21.0V
Temperature coefficient of I_{sc}	(0.065±0.015)%/K
Temperature coefficient of V_{oc}	-(80±10)mV/K
Temperature coefficient of P_{max}	-(0.5±0.05)%/K
NOCT (Air 20°C; Sun 0.8kW/m ² ; wind speed 1m/s)	47±2°C
Maximum series fuse rating	5A
Maximum system voltage	600V (IEC 61215 rating) 1000V (TÜV Rheinland rating)

Standard test conditions - irradiance of 1000W/m² at an AM1.5G solar spectrum and a temperature of 25°C.

Mechanical Characteristics

BP SX 30U

Dimensions (mm) (Overall tolerances +/-3mm)	594 x 502 x 50
Weight (kg)	3.9
Frame	Clear anodised aluminium alloy type 6063T6. Silver Universal frame.
Solar cells	36 cells (57mm x 114mm) configured geometrically for a 4 x 9 matrix connected in series.
Junction box	IP54 junction box with 6 terminal screw connection block, accepts PG 13.5, M20, 13mm conduit or cable fitting. Terminal accepts up to 6mm ² (10 AWG) wire.
Construction	Front: High transmission 3mm tempered glass. Rear: Blue tedlar; Encapsulant: EVA.

Your BP Solar Distributor:

